

SELECTABLE WATTAGE & CCT

Item#: **DL-12-30W 3CCT** **LED 8" SPEC-SELECT™** **COMMERCIAL CAN**

FEATURES

Spec-Select™ Commercial Cans feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- Installation in housings ranging from: 7.6"-9.4"
- Spring action clips

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other commercial applications.

**Not suitable for use with emergency drivers*

ELECTRICAL

| | |
|---------------------------------|-----------------------|
| Wattage | 12W / 20W / 30W |
| Voltage | 100-277V |
| Current | 0.10A / 0.17A / 0.25A |
| Power Factor | 0.9 |
| Total Harmonic Distortion (THD) | -- |

LIGHTING PERFORMANCE

| | |
|--|--|
| Lumens | 996 / 1660 / 2500 |
| Lumens Per Watt (Lm/W) | 83 |
| Color Temperature (CCT) | 3000K / 4000K / 5000K |
| Color Rendering (CRI) | 92 |
| R9 (Red Value) | 65 |
| R13 (Skin Tones) | 94 |
| Beam Angle | 93° |
| Light Distribution | Type VS |
| BUG Rating (Backlight, Uplight, and Glare) | B1 - U1 - G0 |
| Dimmable Lighting Control | <i>Dimmable</i> 0-10V, Range 10% - 100% |

ENVIRONMENT

| | |
|---------------------------|---|
| Operating Temperature | -4° ~ 104°F |
| Suitable Location | WET Indoor / Covered Ceilings |
| Ingress Protection Rating | IP43 |

LIFESPAN

| | |
|----------------------|----------|
| Average Life (Hours) | 50,000 |
| Warranty (Years) | 5 |

COMPONENTS

| | |
|------------------|---------------|
| LED Light Source | Hongli 2835DW |
|------------------|---------------|

CONSTRUCTION

| | |
|---------------------|----------------|
| Housing | Aluminum Alloy |
| Base / Power Supply | Hard Wired |
| Finish | White |

QUALIFICATIONS



Visit www.energystar.gov to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: DL-12-30W 3CCT LED 8" SPEC-SELECT™ COMMERCIAL CAN

DIMENSIONS (Inches)

| | |
|----------------------|-------|
| Length (MOL) | 4.4" |
| Width/Diameter (MOD) | 10.2" |
| Net Weight (Lbs) | -- |

SUPPORTING DOCUMENTS (Grey = not available at this time.)

| | |
|----------------------------|------|
| Product Sheet | VIEW |
| Install Instructions | VIEW |
| IES Download from Web Item | VIEW |
| LM79 | VIEW |
| LM80 | VIEW |

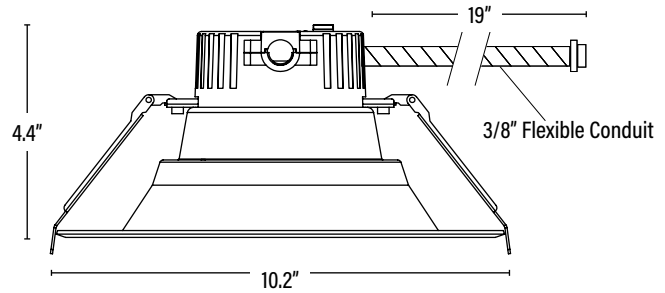

ITEM INFORMATION

PACKAGING

| | |
|-------------------|--------------|
| Master Carton | 6 |
| Individual Box | 1 |
| Country of Origin | China |
| HS Tariff | 9405.10.6020 |

UPC

| |
|----------------|
| 10811768029090 |
| 811768029093 |

DIMENSIONS (LxWxH)


| |
|-----------------------|
| 22.2" x 14.2" x 11.8" |
| 10.8" x 10.9" x 4.4" |

GROSS WEIGHT (Lbs)

| |
|------|
| 13.6 |
| 2.3 |

ADDITIONAL INFORMATION:

- Safety Cable with clip: 21.8"
- Using the sliders on top of the retrofit can, select the desired wattage and color temperature prior to installation. See below:

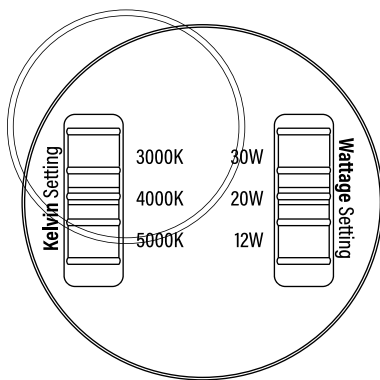

TOP VIEW